

CT520 LANforge WiFIRE 802.11a/b/g/n WiFi Traffic Generator with 32 Virtual STA Interfaces

The CT520 wireless traffic generator is an excellent choice for testing Access Points and other WiFi networks. The CT520 uses a modified Wireless driver for WiFi NICs based on the Atheros chipset. It can support up to 32 Virtual Stations. Each of the Virtual Stations has its own IP address, IP port space, MAC address and routing table. The Virtual Stations can be assigned to communicate to a particular Access Point, use a particular SSID, and have optional WPA2 key assigned. More advanced 802.1X authentication is also included. There is a single WiFi radio per CT520 but multiple LANforge systems can be clustered together for more realistic radio interference patterns and increased traffic generation capability. The radio supports 802.11 a, b, g or n mode. Transmit power and channel/frequency is configured on a per-radio basis. Most other settings are configurable per virtual station.

All virtual stations must be on the same frequency, but as long as the protocol supports that frequency, the multiple protocols can be used concurrently. For instance, if the radio is configured for a 2.4Ghz channel, the stations can be b, g, or n. If the radio is on a 5Ghz channel, the stations can be a or n. The bandwidth can be configured for all protocols. For 802.11n and 802.11AC, configuring the MCS rates also determines the number of spatial streams (1x1, 2x2, 3x3, 4x4 etc).

The Virtual Stations may be configured with all of the virtual interfaces on the same subnet, or different subnets, depending on the testing requirements. When used with something like VoIP, it allows all of the VoIP calls to use the standard IP ports (with one call per virtual interface).

The CT520 has no moving parts (other than the three removable external antenna on swivel mounts) and will fit into a small travel bag or briefcase for easy portability. It is also completely silent, so you can include it in your customer demos and presentations. No additional hardware or software is required, but it is suggested that you manage the system using the LANforge-GUI on a separate machine. The CT520 can also be managed over a serial console in text mode or through a directly connected monitor, mouse and keyboard.



Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618




NOTE: This product may have a different hardware configuration than the system pictured above.
Refer to your official quote for details.

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

Example Network Diagram



LANforge WiFIRE Virtual Station Traffic Generator

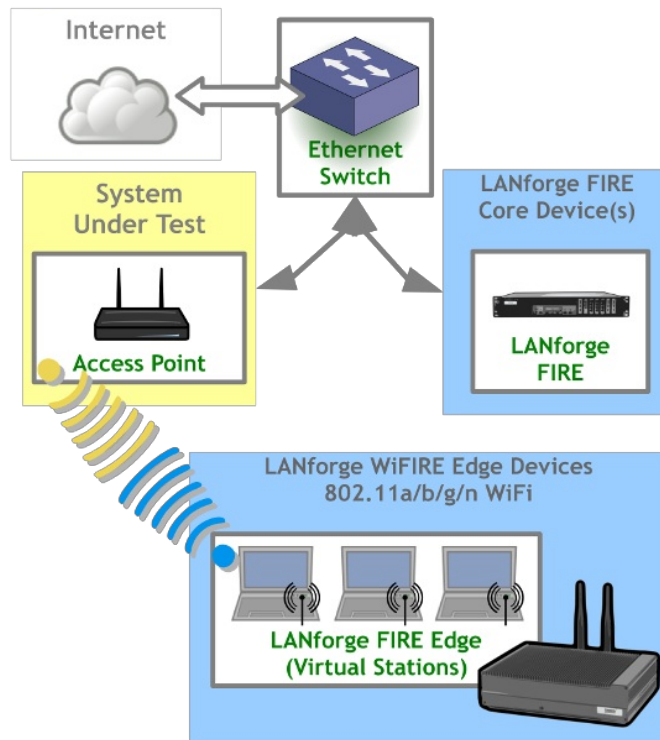

LANforge WiFIRE supports 802.11 Virtual Stations and Access Points*. To the System Under Test, it appears as if there are multiple PCs sitting inside the LANforge system generating independent traffic streams over Wireless NICs.

Many Virtual Station interfaces are supported per LANforge WiFIRE machine. LANforge can send traffic from one physical interface on the local machine to another interface on that same machine. Each physical and virtual interface can be configured on the same, or on different IP subnets.

In the configuration on the left, the LANforge FIRE Core can be one physical Ethernet interface and act as the server. The LANforge FIRE Edge can be the Virtual Station interfaces configured on the WiFi radio. Both interfaces can be on the same machine or multiple LANforge machines can be clustered together for increased traffic generation capacity.

* All system support 802.11 a/b/g/n.
Some systems support 802.11ac as well.

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618

Quick Start Guide

1. Connect Management Ethernet port to Management network or management PC. If connecting directly to a PC, an Ethernet cross-over cable should be used.
2. Connect eth1 wired Ethernet interface to wired Ethernet interface on the AP or network under test. This usually is considered the 'server' side of the network.
3. The Client side of the network will be the Virtual Stations configured on the CT520 WiFi NIC(s).
4. Connect power to standard US or European AC power source. If using external battery pack, then connect to that instead. Click button to power on the unit.
5. The CT520 should now boot. If DHCP is enabled on the Management network, the CT520 will automatically acquire an IP address. If DHCP is not available, the IP address will be set to **192.168.1.101**.
6. Install the LANforge-GUI on a separate management PC or Laptop, or use VNC or remote-desktop programs to access the LANforge system directly. Windows, MAC-OS and Linux GUIs are supported: Select the correct one from the web page served from the LANforge system and install it.
7. Start the LANforge-GUI on the management PC and click the 'Discover' button. It should find the CT520 appliance and add the IP address to the drop-down box in the Connect widget. Press 'Connect' and

you will be connected to the CT520.

8. Select the Port Mgr tab in the GUI. Double-click on the device called 'wiphy0'. This is the Radio device, and should be configured for the correct, channel, country-code, etc. Next, select one or more of the Virtual Station interfaces and click 'Modify'. Enter the correct IP address information, SSID and WPA/WPA2 password (if Enabled). After applying these changes, the Virtual Station interface should associate with the AP and be ready to send traffic. You may create up to 32 Virtual Station interfaces per CT520 with the 'Create' button.
9. Once the interfaces are configured correctly, you can click on the Layer 3, VOIP/RTP and other LANforge-FIRE related GUI tabs and configure/modify/start/stop particular traffic patterns that utilize the virtual stations and wired Ethernet interface. In most cases, you will want one of the FIRE endpoints to be on the wired interface and the other to be on the WiFi Virtual Station interface. It is also valid to generate traffic between two Virtual Station interfaces. The GUI Chamber View window provides some automated test suites. Contact support if you have suggestions for improvements.
10. Any GUI modifications take place immediately after you click 'Submit' or 'OK'.

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

LANforge WiFIRE Related Images

Virtual Station Configuration Screen

sta2003 (jedway1) Configure Settings

Port Status Information

Current: LINK-UP GRO Authorized

Driver Info: Port Type: WIFI-STA Parent: wiphy0 [wiphy0...](#)

Port Configurables

Standard Configuration | Advanced Configuration | Misc Configuration | Corruptions | Custom WiFi

Enable

- ☐ Set IF Down
- ☐ Set MAC
- ☐ Set TX Q Len
- ☐ Set MTU
- ☐ Set Offload
- ☐ Set PROMISC

Services

- ☐ HTTP
- ☐ FTP
- ☐ RADIUS

Low Level

- ☐ PROMISC
- ☒ TSO Enabled
- ☐ UFO Enabled
- ☐ GSO Enabled
- ☐ LRO Enabled
- ☒ GRO Enabled

General Interface Settings

☐ Down ☐ Aux-Mgt

☐ DHCP-IPv6 ☒ DHCP Release DHCP Vendor ID:

☒ DHCP-IPv4 [Secondary-IPs](#) DHCP Client ID:

DNS Servers: Peer IP:

IP Address: Global IPv6:

IP Mask: Link IPv6:

Gateway IP: IPv6 GW:

Alias: MTU:

MAC Addr: TX Q Len:

Rpt Timer: WiFi Bridge:

WiFi Settings

SSID: AP:

Key/Phrase: Mode:

Freq/Channel: Rate:

☐ WPA ☒ WPA2 ☐ OSEN ☐ WEP

☐ Disable HT40 ☐ Enable VHT160 ☐ Disable SGI

[Print](#) [Display](#) [Probe](#) [Display Scan](#) [Sync](#) [Apply](#) [OK](#) [Cancel](#)

Layer 3 (Ethernet, UDP, TCP) Connections

LANforge Manager Version(5.2.13)

Control Reporting Tear-Off Info Plugins

Stop All Restart Manager Refresh HELP

Attenuators File-IO Layer-4 Test Mgr Test Group Resource Mgr Event Log Alerts Port Mgr Messages

Status Layer-3 L3 Endps WanLinks

Rpt Timer: fast (1 s) Go Test Manager all Select All Start Stop Quiesce Clear

View 0 - 200 Display Create Modify Delete

Cross Connects for Selected Test Manager

Name	Type	State	Pkt Rx A → B	Pkt Rx A ← B	Rate A → B	Rate A ← B	Rx Drop % A	Rx Drop % B	Drop Pkts A	Drop Pkts B	Avg RTT
xcdx-1	LF/UDP	Run	17,294	17,549	9,998,239	9,997,437	0	0	0	0	1
xcdx-10	LF/UDP	Run	17,377	17,716	9,997,632	9,996,340	0	0	0	0	0
xcdx-2	LF/UDP	Run	17,548	17,802	9,997,351	9,996,964	0	0	0	0	0
xcdx-3	LF/UDP	Run	17,633	17,802	9,997,891	9,996,964	0	0	0	0	0
xcdx-4	LF/UDP	Run	17,633	17,802	9,997,891	9,996,964	0	0	0	0	1
xcdx-5	LF/UDP	Run	17,718	17,036	9,997,947	9,992,326	0	0	0	0	1
xcdx-6	LF/UDP	Run	17,718	17,044	9,997,947	9,997,018	0	0	0	0	1
xcdx-7	LF/UDP	Run	17,718	17,044	9,997,947	9,997,018	0	0	0	0	1
xcdx-8	LF/UDP	Run	17,718	17,044	9,997,947	9,997,516	0	0	0	0	1

Logged in to: 192.168.100.26:4002 as: Admin

Layer 3 Create/Modify Screen

udp-se - Create/Modify Cross Connect

Display Sync Batch-Create Apply OK Cancel

1 Cross-Connect

CX Name: udp-se
CX Type: LANforge / UDP

	Endpoint A	Endpoint B
Resource:	1 (brent-6port)	1 (brent-6port)
Port:	1 (eth0)	2 (eth1)
Min Tx Rate:	New Modem (56 Kbps)	New Modem (56 Kbps)
Max Tx Rate:	Same	Same
Min PDU Size:	AUTO	AUTO
Max PDU Size:	Same	Same
IP ToS:	Best Effort (0)	Best Effort (0)
Pkts To Send:	Infinite	Infinite

2 Cross-Connect

Report Timer: default (5 s)

	Endpoint A	Endpoint B
Pld Pattern	increasing	increasing
Min IP Port:	AUTO	AUTO
Max IP Port:	Same	Same
Min Duration:	Forever	Forever
Max Duration:	Same	Same
Min Reconn:	0 (0 ms)	0 (0 ms)
Max Reconn:	Same	Same
Multi-Conn:	Normal (0)	Normal (0)

Script Thresholds Script Thresholds

3 Cross-Connect

Test Manager: default_tm
Quiesce: 3 (3 sec)

	Endpoint A	Endpoint B
IP Addr:	AUTO	AUTO
Replay File	<input type="checkbox"/>	<input type="checkbox"/>
Loop	<input type="checkbox"/>	<input type="checkbox"/>
Dest Mac	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Filename:		
Dest MAC:	<custom>	<custom>

4 Cross-Connect

	Endpoint A	Endpoint B
Snd Buff Size:	OS Default	OS Default
Rcv Buff Size:	OS Default	OS Default
Send Bad FCS:	zero (0%)	zero (0%)
Src MAC:	00:00:00:00:00:00	00:00:00:00:00:00
Use-Proxy	<input type="checkbox"/>	<input type="checkbox"/>
Proxy Addr:	0.0.0.0	0.0.0.0
Proxy Port:	0	0
Socket Priority:	0	0

Payload Payload

5 Cross-Connect

	Endpoint A	Endpoint B
Conn Timeout:	10s (10 s)	10s (10 s)
TCP MSS:	OS Default	OS Default

	Endpoint A	Endpoint B
Do Checksum	<input type="checkbox"/>	<input type="checkbox"/>
UnManaged	<input type="checkbox"/>	<input type="checkbox"/>
Duration Quiesce	<input type="checkbox"/>	<input type="checkbox"/>
Quiesce-After-Range	<input type="checkbox"/>	<input type="checkbox"/>
TCP_NODELAY	<input type="checkbox"/>	<input type="checkbox"/>
Concurrent IP Adrs	<input type="checkbox"/>	<input type="checkbox"/>
Clear-Port-On-Start	<input type="checkbox"/>	<input type="checkbox"/>
Linear-IP-Ports	<input type="checkbox"/>	<input type="checkbox"/>

Endp Name: udp-se-A udp-se-B

Software Features

- Supports real-world protocols:
 - Layer 2: Raw-Ethernet.
 - 802.1Q VLANs.
 - PPPoE: Integrated PPPoE support.
 - Layer 3: IPv4, IPv6, UDP/IP, IGMP Multicast UDP, TCP/IP.
 - Layer 4-7: FTP, HTTP, HTTPS, TFTP, SFTP, SCP
 - 802.11a/b/g/n Wireless Station (up to 32 per machine).
 - Layer 4-7: TELNET, PING, DNS, SMTP, NMAP (via add-on script).
 - File-IO: NFSv3, NFSv4, CIFS, iSCSI.
- Supports up to 1000 concurrent TCP connections with base license package.
- The CT520 is able to push up to 355Mbps through an AP, depending on the protocols mix, wireless mode and environment, and speed of the network under test. Supports at least 10 VoIP (SIP, RTP) calls if appropriate licenses are purchased. More powerful systems are also available.
- Supports real-world compliance with ARP protocol.
- Supports ToS (QoS) settings for TCP/IP and UDP/IP connections.
- Uses publicly available Linux and Windows network stacks for increased standards compliance.
- Utilizes [libcurl](#) for FTP, HTTP and HTTPS (SSL), TFTP and SCP protocols.

8. Supports file system test endpoints (NFS, CIFS, and iSCSI file systems, too!). File system mounts can use the virtual interface feature for advanced testing of file server applications.
9. Supports custom command-line programs, such as telnet, SMTP, and ping.
10. Comprehensive traffic reports include: Packet Transmit Rate, Packet Receive Rate, Packet Drop %, Transmit Bytes, Receive Bytes, Latency, Jitter, various Ethernet driver level counters, and much more.
11. Supports generation of reports that are ready to be imported into your favorite spread-sheet.
12. Allows packet sniffing and network protocol decoding with the integrated **Wireshark** protocol sniffer.
13. GUI runs as Java application on Linux, MAC and Microsoft Operating Systems (among others).
14. GUI can run remotely, even over low-bandwidth links to accommodate the needs of the users.
15. Central management application can manage multiple units, tests, and testers simultaneously.
16. Includes easy built-in scripting for iterating through rates and packet sizes, with automated reporting. Also supports scriptable command line interface (telnet) which can be used to automate test scenarios. Perl libraries and example scripts are provided!
17. Automatic discovery of LANforge data generators simplifies configuration of LANforge test equipment.
18. LANforge traffic generation/management software is supported on Linux and MS Windows.

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

Hardware Specification

1. Midrange Appliance with no moving parts.
2. Operating System: Fedora Linux with customized Linux kernel.
3. Two 1Gbps Ethernet ports, slot for WiFi or other add-in NIC
4. Atheros chipset based 802.11a/b/g/n 3x3 MIMO Wireless NIC with three external antenna. Supports up to 32 virtual stations.
5. 1.6 GHz Intel Atom N270 processor.
6. RJ45 Serial console (115200 8 N 1) for console management & initial configuration.
7. VGA, USB ports for desktop usage.
8. 2 GB RAM.
9. 16 GB Solid State Hard Drive.
10. Larger storage drive and compact-flash available.
11. 9-36v 4AMP external power supply (brick).
12. Weight: 5.7 lbs or 2.6 kg.
13. Dimensions: 11 x 7.5 x 2.5 inches Metric: 268 x 190 x 65 mm.
14. Operating Temperature: -10 ~ 55°C.
15. Operating Humidity: 5 ~ 95%.
16. Shock CFD: 100g peak acceleration (6 msec duration)

Additional Feature Upgrades

Unless otherwise noted in the product description, these features usually cost extra:

- WanPaths (LANforge-ICE feature set)
- Virtual Interfaces: MAC-VLANs, 802.1Q VLANs, WiFi stations, etc
- FIRE Connections: Base FIRE license includes 1000 active connections.
- **WiFi RF Attenuator**: Adjust WiFi signal strength in a controllable manner.
- **RF Noise generator**: Generate modulated WiFi RF noise.
- **RF Noise / Radar Simulator**: Simulate RADAR pulses and other non-modulated RF noise.
- **SMA RF Cable Bundle**: Used to cable LANforge WiFIRE radios to device-under-test.
- LANforge-ICE Network Emulation.
- VOIP: Each concurrent call over the included package requires a license.
- **VoIP-Mobile Audio Quality Testing using POLQA/PESQ**.
- **Mobile-Mobile Audio Quality Testing using POLQA/PESQ**.
- Armageddon: Each pair of ports requires a license if not already included.
- **RF Chambers for WiFi testing**.
- External battery pack: 12+ hours for CT520, CT523, CT92X and other platforms.

*Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618*

Last modified: Mon Feb 3 05:56:21 PM PST 2025