

CT714b LANforge-Attenuator with 4 Attenuator Channels: 50 MHz - 8 GHz

The CT714b RF Attenuator is used to attenuate (decrease) the RF signal between wireless devices. A summary of the technical specifications is below:

Max RF Power:	+28 dBm
Impedance:	50 Ω
Frequency Range:	50 MHz – 8.0 GHz
Attenuation Range:	0 – 95 dB
Attenuation Steps:	0.25 dB increments

The CT714b may be controlled through software access over the USB-Serial port. The included LANforge software suite supports automated scripting as well as manual configuration of the attenuator modules.

The CT714b is a test tool and should be used in an RF enclosure to prevent un-intended RF interference with other equipment.

The CT714b has no moving parts and will fit into a small travel bag or briefcase for easy portability.


The CT714b includes 8 SMA-Male to SMA-Male semi-rigid RF cables, and a USB Cable for both management and power supply.



NOTE: This product may have a different hardware configuration than the system pictured above.
Refer to your official quote for details.

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618

Example Network Diagram

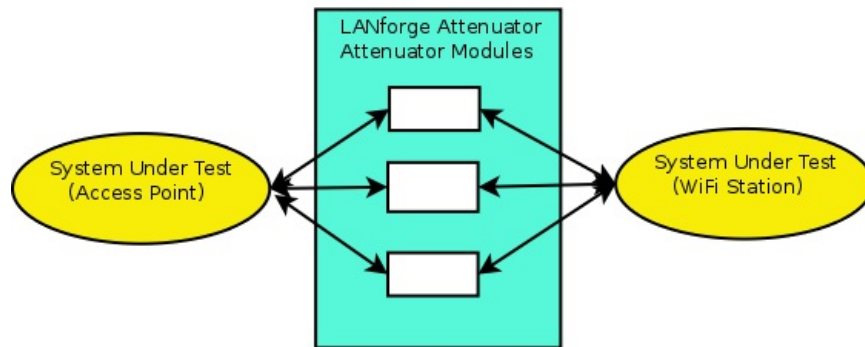

The LANforge attenuator sits between two RF systems, often a WiFi AP on one side and WiFi Station on the other. The attenuator and WiFi stations are connected by shielded SMA-Male cables. Adjust the attenuation as desired either with the LANforge GUI or direct access over serial.


Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618

Quick Start Guide

1. Connect the CT714 to a Linux system running LANforge with the included USB cable. The USB cable allows control of the CT714. The USB cable also provides power so no other power cable is required.
2. Connect the attenuator pairs: One side to one system and the other side to another system or antennas.
3. Open a LANforge GUI and connect to the Linux system with the CT714.
4. In the Attenuator tab, you should see the CT714 device. Modify it to set attenuation values manually and/or configure a script to change attenuations automatically.
5. One useful feature for the CT714 is the Rate vs Range test in Chamber View. The second screenshot below shows the possible options this feature gives. For more information, please see [Testing Rate vs Range throughput for a WiFi Device](#).

LANforge-Attenuator Related Images

LANforge Attenuator Configuration Screen

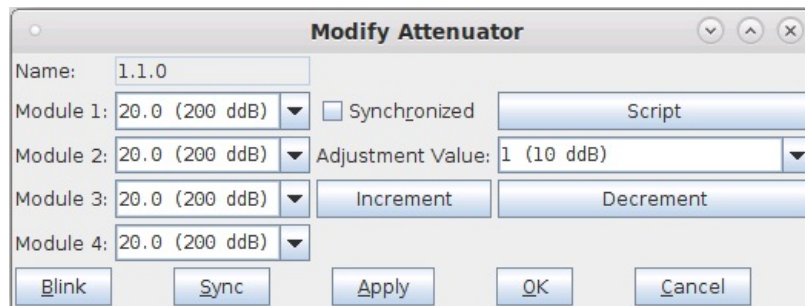

The screenshot shows the 'Modify Attenuator' dialog box. It contains the following fields and controls:

- Name:** A text field containing '1.1.0'.
- Module 1:** A dropdown menu showing '20.0 (200 ddB)'.
- Module 2:** A dropdown menu showing '20.0 (200 ddB)'.
- Module 3:** A dropdown menu showing '20.0 (200 ddB)'.
- Module 4:** A dropdown menu showing '20.0 (200 ddB)'.
- Synchronized:** An unchecked checkbox.
- Script:** A button.
- Adjustment Value:** A dropdown menu showing '1 (10 ddB)'.
- Increment:** A button.
- Decrement:** A button.
- Blink:** A button.
- Sync:** A button.
- Apply:** A button.
- OK:** A button.
- Cancel:** A button.

LANforge Attenuator Rate vs Range Test

Rate vs Range Test

Settings | Advanced Configuration | Report Configuration

Selected DUT: netgear-r7800 | Duration: 15 sec (15 s)

Downstream Port: 1.1.21 sta0 | Upstream Port: <Custom>

Path Loss: 10 | Rate: 85%

Channels	Mode	Packet Size
AUTO	Auto	78
No-Change	802.11a	142
1	802.11b	256
2	802.11g	512
3	802.11abg	1024
4	802.11abgn	MTU
5	802.11bgn	4000
6	802.11bg	9000

Spatial Streams	Security	Bandwidth
AUTO	AUTO	AUTO
1	Open	20
2	WEP	40
3	WPA	80
4	WPA2	160
	WPA3	

Traffic Type: UDP | TCP

Direction: DUT Transmit | DUT Receive

Attenuator: 1.1.0 | 0..+50..950

Start | ☐ Another Iteration | ☐ Pause | **Cancel**

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
 www.candelatech.com | sales@candelatech.com | +1 360 380 1618

Software Features

1. Using Rate vs Range, an AP can be tested how well it can transmit packets at different signal levels for transit and receive.
2. Emulate mesh node distance.
3. Test device roaming between APs.
4. Test how well the AP can receive packets with different MCS at different RF Signal levels.

Hardware Specification

1. RF Attenuator with 0.005 Ghz to 8 Ghz.
2. USB-Serial console (115200 8 N 1) for scripting and automated control.
3. Weight: 3 lbs or 1.36 kg.
4. Dimensions: 11.7 x 3.5 x 1 inches Metric: 296 x 89 x 24 mm.
5. Operating Temperature: 0 ~ 60°C.
6. Operating Humidity: 10 ~ 90%.

7. Certification: RoHS.

Max RF Power:	+23 dBm			
Impedance:	50 Ω			
Frequency Range:	50 MHz – 8.0 GHz			
Attenuation Range:	0 – 95 dB			
Attenuation Steps:	0.25 dB increments			
Insertion Loss (dB):	Frequency	Typical		Max
	50 Mhz	4.2		4.5
	2400 Mhz	6.1		6.5
	6000 Mhz	8.5		10.0
	8000 Mhz	10.1		12.5
Attenuation Accuracy (dB):	Frequency	Conditions	Typical	Max
	50 - 2000 Mhz	0.25 - 20	± 0.25	$\pm(5.5\% \text{ of Atten.} + 0.25)$
		20.25 - 60	± 0.50	$\pm(2.0\% \text{ of Atten.} + 0.90)$
		60.25 - 90	± 0.75	$\pm(3.5\% \text{ of Atten.} + 0.70)$
	2000 - 4000 Mhz	0.25 - 20	± 0.20	$\pm(5.5\% \text{ of Atten.} + 0.25)$
		20.25 - 60	± 0.30	$\pm(2.0\% \text{ of Atten.} + 0.70)$
		60.25 - 90	± 0.40	$\pm(3.0\% \text{ of Atten.} + 0.90)$
	4000 - 8000 Mhz	0.25 - 20	± 0.15	$\pm(6.5\% \text{ of Atten.} + 0.15)$
		20.25 - 60	± 0.35	$\pm(3.5\% \text{ of Atten.} + 0.45)$
		60.25 - 90	± 0.65	$\pm(3.5\% \text{ of Atten.} + 0.90)$

Additional Products

For a more complete WiFi testing setup, you may wish to consider the [CT711 RF Noise generator](#), [CT712 RADAR Simulator](#), [CT523](#) and [CT525](#) series WiFi traffic generators.

Candela Technologies Inc., 2417 Main Street, Suite 201, P.O. Box 3285, Ferndale, WA 98248, USA
www.candelatech.com | sales@candelatech.com | +1 360 380 1618

Last modified: Wed Oct 25 04:10:17 PM PDT 2023